



BLANKET MEDIUM THERMAL (ICRC/IOM)




BLANKET MEDIUM THERMAL ICRC/IOM STANDARD

FEATURES

- Knitted blanket dry raised on both sides
- Resistant to fire, thermal and airflow
- Comfortable and lightweight
- Customizable logo can be pasted as per the requirements
- Recyclable yarn can also be used as per the client requirements

Dimensions

Length	2.0 m (Tolerance - 1-3%)
Width	1.50 m (Tolerance - 1-3%)
Weight	400 - 700 gsm
Edges	Whipped seam at 10 mm from the edge with 10 - 13 stitches/10 cm on 4 sides
Thickness	ISO 5084, 6.5 mm minimum (1KPa on 2000 mm ²)
Tog	ISO 5085-1: TOG 2.5 (or 0.25m ² K/W) minimum
Shrinkage	ISO 6330: Max 5% warp and weft

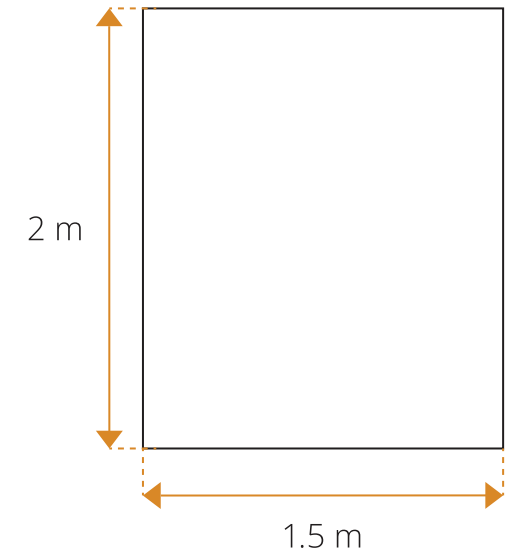

MATERIAL

COMPOSITION 100% virgin fibers from polyester, knitted and dry raised on both sides, ISO C1833 on dry weight. – **Recyclable polyester can also be used as per client's request.**

COLOR Grey

TENSILE STRENGTH ISO 13934-1: 250N warp and weft minimum

WEIGHT LOSS AFTER WASHING Max 5% after 3 consecutive machine washes at 30°C and one flat drying


AIRFLOW RESISTANCE ISO 9237 under 100Pa pressure drop: Max 1000L/m²/s

FIRE RESISTANCE ISO 12952: Resistance to cigarette. No ignition
ISO 12952: Resistance to flame. No ignition
Specification under normal textile test conditioning ISO 139, 65% moisture, 20°C for 24 hours


ORGANOLEPTIC TEST No bad smell, no skin irritation, no dust. 4<pH<9. Free from harmful VOC. Fit for human use

FINISH Whipped seam at 10 mm from the edge with 10-13 stitches/10 cm on 4 sides

Bale Packing

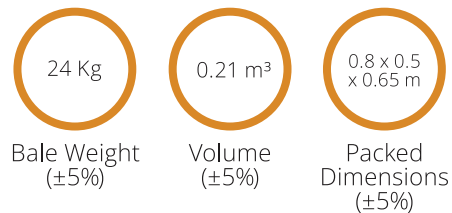

CRI Pallet

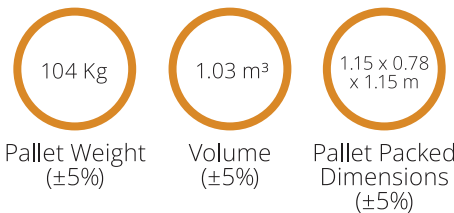

CONTAINER LOADABILITY

Bale Packing
(20 Pcs per Bale)
20FT: 96 Bales (1920 Pcs)
40DC: 204 Bales (4080 Pcs)
40FT HC: 255 Bales (5100 Pcs)

CRI Pallet
(2 Bales/40 Pcs per Pallet)
20FT: 42 Pallets (1680 Pcs)
40DC: 90 Pallets (3600 Pcs)
40FT HC: 90 Pallets (3600 Pcs)

