

# STOVE



## STOVE UNHCR/ICRC/IFRC STANDARD

### FEATURES

- Efficient wood-burning stove for standard tents and shelters with chimney openings
- Maximized effectiveness when used with UNHCR/ICRC Standard Winterization Kit
- Has a loading door & can control air intake.

### Dimensions

Chimney Pipe	50 cm long
Chimney Outlet	90 mm


### MATERIAL

STOVE	2 mm thick, made of Steel
CHIMNEY OUTLET	90 mm thick, made of Steel
CHIMNEY PIPES	6 pipes made of Galvanized Steel, Rust Proof
CHIMNEY ELBOWS	2 Elbows, made of Steel, Rust Proof
CHIMNEY HOOD	1, made of Steel, Rust Proof
DISC	1 Anti-Sparc disc, made of Steel
BRACKETS	2 Brackets for holding pipes and to support. Made of Steel, Rust Proof
TRIPOD SUPPORT	Made of Square Steeltube, minimum 25 x 1 mm thick, Anti-Rust paint


### CONTENTS

- Outlet to fit 100 mm Pipes
- 6 Chimney Pipes made of Galvanized Steel & Anti-Rust
- 2 Bend Connectors made of Steel
- 1 Outlet cover pointed cap shape
- 1 Spark Stopper dimensions: Height 180 mm, Outer diameter 300 mm and Inner plate 180 mm
- 1 Ash removing bar
- 1 Tripod Pipe stand to keep the smoke pipe standing up outside the tent, supported with 3 x 6 mm guy ropes. Supplied with 2 clamps, 3 ground pins for stand support and 3 pegs for guy ropes
- 1 Spanner
- 1 Assembly Instruction Sheet

### Non-Palletized

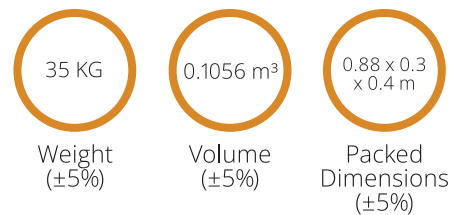

### Palletized

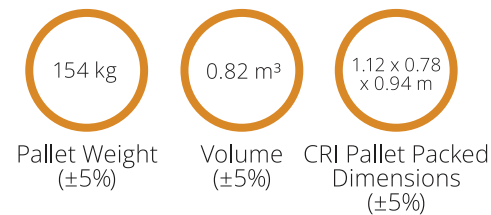

### CONTAINER LOADABILITY

#### Non-Palletized

- 20FT: 210 Pcs
- 40DC: 455 Pcs
- 40FT HC: 540 Pcs

#### Palletized

- (4 Cartons per Pallet)
- 20FT: 28 Pallets (112 Pcs)
- 40DC: 60 Pallets (240 Pcs)
- 40FT HC: 60 Pallets (240 Pcs)